


60W AC Induction/Reversible Motor (交流马达) w/ Speed Control, Brake (速度控制, 电磁刹车)



● Motor Dimensions:

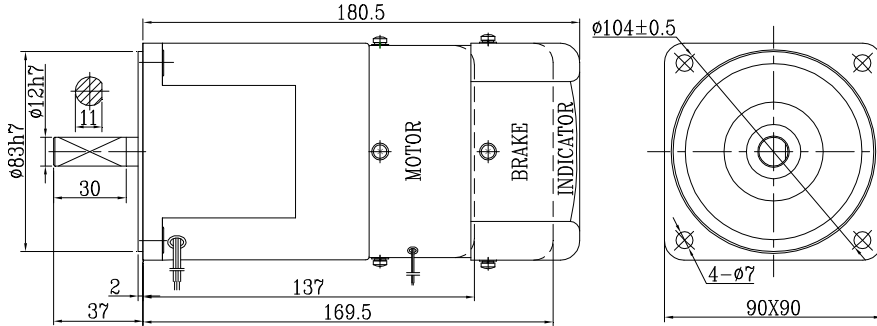

● Motor Specifications:


$Y(\text{in-lb}) = 0.867313 * X(\text{Kg.cm})$

Model	Type	Power		Poles	Phase	Volt	Freq.	Rated				Starting Torque		Duty	Capacitor	
		W	HP					Speed	Current	Torque		mNm	kg-cm		uF	Vac
				RPM	Amp	mNm	kg-cm	mNm	kg-cm							
90IK60-4S11-6	Induction	60	1/12	4	1	110	60	1550	0.98	390	3.98	380	3.87	Cont.	15	250
90IK60-4S22-5		60	1/12	4	1	220	50	1350	0.52	440	4.49	400	4.08	Cont.	4	450
90IK60-2S22-5		60	1/12	2	1	220	50	2750	0.56	210	2.14	250	2.55	Cont.	4	450
90IK60-4T22-5		60	1/12	4	3	220	50	1300	0.49	460	4.69	1700	17.3	Cont.		
90IK60-2T38-5		60	1/12	4	3	380	50	1300	0.28	460	4.69	1700	17.3	Cont.		
90RK60-4S11-6	Reversible	60	1/12	4	1	110	60	1550	1.10	390	3.98	450	4.59	30Min.	18	250
90RK60-4S22-5		60	1/12	4	1	220	50	1350	0.54	440	4.49	450	4.59	30Min.	4.5	450

Model	Type	Power	Range	Poles	Phase	Volt	Freq.	Rated Torque				Starting Torque		Duty	Capacitor	
								1200 RPM		90 RPM		mNm	kg-cm		mNm	kg-cm
		W	RPM	P	Ph	Vac	Hz	mNm	kg-cm	mNm	kg-cm	mNm	kg-cm			
90IK60-4S11-6	Speed Control	60	90 ~	4	1	110	60	500	5.10	140	1.43	310	3.16	Cont.	15	250
90RK60-4S11-6		60	1600	4	1	110	60	540	5.51	155	1.58	330	3.37	30Min.	18	250
90IK60-4S22-5		60	90 ~	4	1	220	50	500	5.10	140	1.43	310	3.16	Cont.	4	450
90RK60-4S22-5		60	1400	4	1	220	50	540	5.51	155	1.58	330	3.37	30Min.	4.5	450

● Capacitor Dimensions:

Capacity	Voltage	L ± 1	W ± 1	H ± 1
uF	VAC	Mm	mm	mm
4	450	47	22	34
4.5	450	47	22	34
15	250	57	32	46
18	250	57	32	46

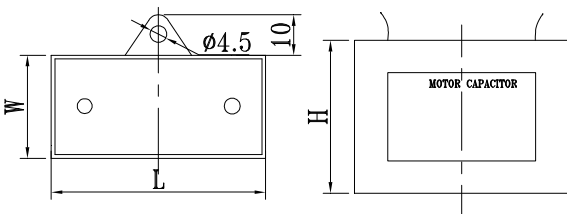

● Wiring Diagrams:

